




Standard Locker Frames and Seating



The support frames are constructed from 25mm square mild steel tube, with a powder-coated finish. The back legs will be inset 25mm as standard, other insets on request.



Locker Support/Seat frames are constructed as above, and they come fitted with 50mm wide x 22mm thick Utile hardwood slats polished and stained medium brown.




Our Bench Seats are constructed from 25mm square mild steel tube, with a powder-coated finish. They come fitted with 22mm thick Utile hardwood polished and stained medium brown. Leg insets on request, none as standard.



Single Sided Seat Units are constructed as above, and come fitted with 22mm thick Utile hardwood slats, backrest and hookboard polished and stained medium brown. The hookboards are fitted with aluminium coat hooks on 150mm Ctrs.

The above units can be manufactured in electro-coated or stainless steel tube, with plastic adjustable feet for use in wet areas if required. They can also be fitted with Trespa laminate slats, backrest and hookboard if required to match their surroundings.

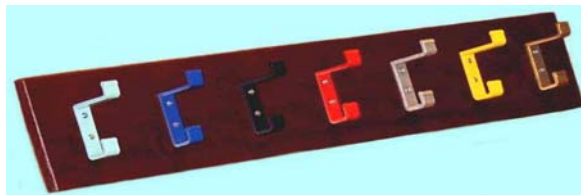

Our Hookboards can be fitted with a range of coloured hooks, for use in factory shift patterns or school areas for different years. The standard colour of hook is silver.

Our Cantilevered Seat Range is constructed mainly from 38mm square mild steel tube, with a powder-coated finish, and are predrilled for slats and wall fixing. We recommend the distance between brackets should not be greater than 600mm.