
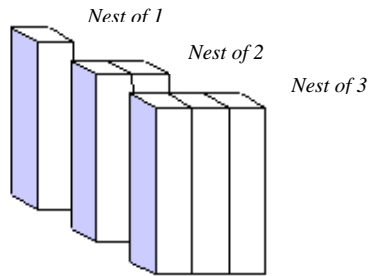


SPECIFICATION SHEET: S001

SYSTEM 1301 VEDETTE RANGE

FULL LENGTH LOCKERS



Dimensions:

Height	Width	Depth	Nesting
1775 mm	225 mm	450 mm	- 2 3
1775 mm	300 mm	300 mm	1 2 3
1775 mm	300 mm	450 mm	1 2 3
1775 mm	300 mm	550 mm	1 2 3
1775 mm	380 mm	380 mm	1 2 3
1775 mm	380 mm	450 mm	1 2 3
1775 mm	380 mm	550 mm	1 2
1775 mm	450 mm	450 mm	1 2
1775 mm	450 mm	550 mm	1 2

Strength and Security with Style

Sturdy Construction	Door frame constructed from heavy gauge mild steel of press formed channel section.
Door Strength	Full length door stiffeners for extra door rigidity and three 'five knuckle' semi-concealed hinges.
Style	Attractive and functional locker design.
Colour	Automated paint plant ensures consistent high quality finish in a wide range of modern colours.

Detailed Product Specification

Nesting:	Lockers can be supplied as single units or nested in groups during the manufacturing process. All lockers are holed in back and sides to enable them to be bolted together into rows or back to back to suit your requirements. Note: When preparing locker room layouts allow approximately 4 mm extra for each nest for rivet heads at the sides of lockers in each row.
Construction:	Spot welded and pop riveted.
Material & Finish:	Mild steel-stove enamelled (see Finish specification).
Door Frame Assembly:	Comprising two uprights manufactured from heavy gauge mild steel of press formed channel section; top and bottom cross members which are designed to create door stops. Spot welded construction produces a rigid frame enabling door clearances to be maintained in accordance with British Standard requirements. The top cross member is provided with a series of ventilation slots.
Doors:	Doors are attached to the right hand side of doorframe upright with three 'five knuckle' semi-concealed hinges. Doors are fitted with a plastic escutcheon plate around the lock, which can also act as a name card/locker number holder. The inside of the door has a full length vertical 'stiffener' to provide greater rigidity. Two rubber buffers are fitted to the top and bottom corners of the door for quiet closure.
Bottom:	The bottom is formed as a 60 mm high plinth. All edges have return bends and the front and rear edges drilled for fitting to stands or stands with seat.
Shelf:	The lockers are fitted with a shelf 315 mm from the top, giving a clear 250 mm opening, allowing adequate space for the average crash helmet with chin protector, or other articles.
Hook & Hanger Rails:	A coat hook is located each side of the main compartment under the shelf; for lockers over 300 mm deep a plastic coated clothes hanger rail is also fitted.
Locking:	Standard options are either 10 disc tumbler cam lock in mastered suite with two keys to each lock or, at no extra cost, a latch lock for the user's own padlock (recommended padlock shank dimensions 6 mm). Recommended padlocks are available from Davian Systems. As an optional extra for added security we can supply full reach espagnolette bolts giving three point locking (ie, top, bottom and centre) with either of the standard locking options. We can also supply, as an optional extra, a door-mounted combination lock with master key over-ride facility and user codes which can be reset.

